


ELECTRICAL & MECHANICAL SPECIFICATION



ELECTRONICAL SPECIFICATION

Input Voltage	230	Vac
Frequency (Hz)	50	Hz
Power Rated (W)	5	VA
Exciting Current With No load	20	mA Max
Exciting Current With Full load	50	mA Max
Output Voltage	3.0	Vac ±5%
Output Current	667	mA
Output Voltage Without Load	4.0	Vac±5%
HI-POT :		
Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	45	%
Insulation Class	B (130)	°C
protection index	IP20	

Dimension Drawings

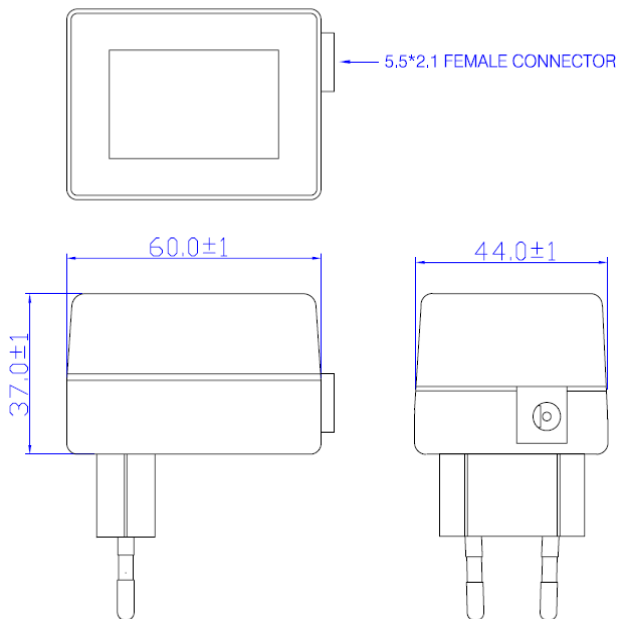

Input Cable: **EUROPE PLUG IN**

Output Cable: **5.5*2.1 FEMALE CONNECTOR**

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	66.0*44.0*37.0	mm
Weight	205	g
<i>Environment:</i>		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Humidity	0 To 90	%RH

ELECTRICAL CIRCUIT

