


ELECTRICAL & MECHANICAL SPECIFICATION



RoHS ✓




ELECTRONICAL SPECIFICATION

Input Voltage	240	Vac
Frequency (Hz)	50	Hz
Power Rated (W)	8	VA
Exciting Current With No load	25	mA Max
Exciting Current With Full load	40	mA Max
Output Voltage	6.0	Vac ±5%
Output Current	600	mA
Output Voltage Without Load	7.8	Vac±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	50	%
Insulation Class	B (130)	°C
protection index	IP20	

Dimension Drawings

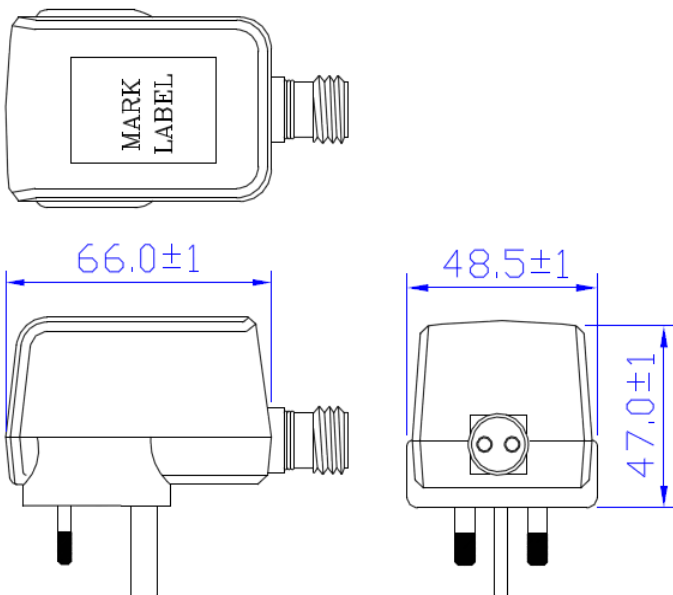

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	66.0*48.5*47.0	mm
Weight	220	g
<i>Environment:</i>		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Humidity	0 To 90	%RH

Input Cable: **BS PLUG IN**

Output Cable: **2.35 ∅ FEMALE CONNECTOR**

ELECTRICAL CIRCUIT

